


We bring Power to your Life



UJD110

U Power Generation System

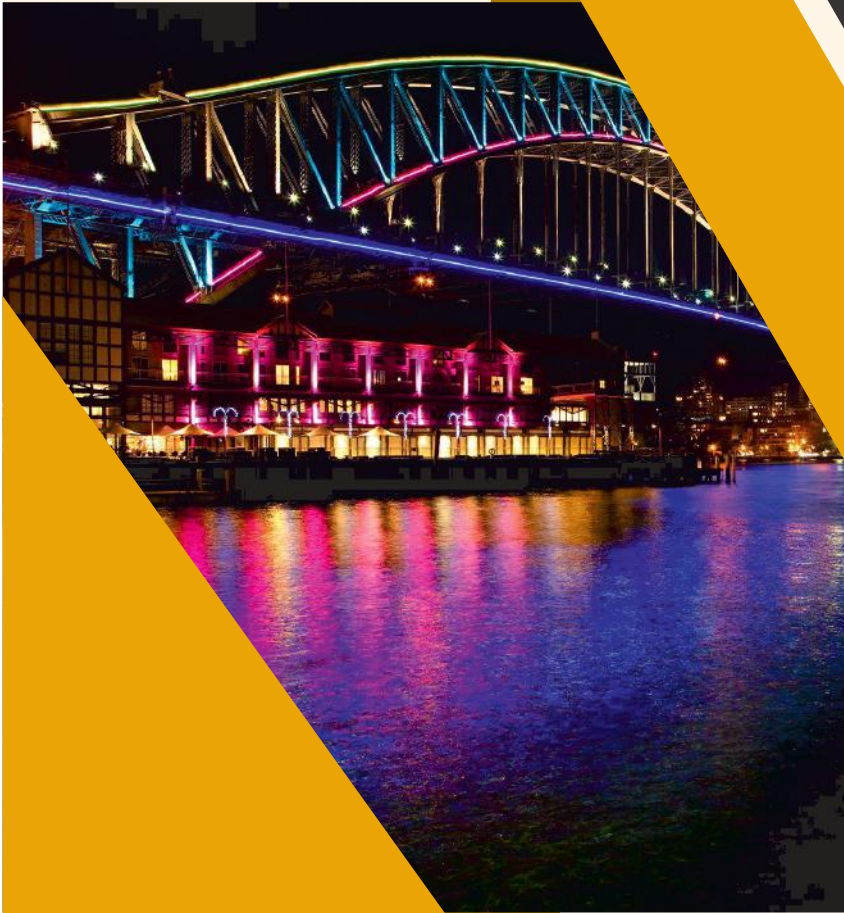

www.upower.com.tr
info@upower.com.tr
T. +90216 606 1380



INTRODUCTION

U Power Generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Power (kVA)

3 Phase, 50 Hz, PF 0.8

VOLTAGE	STANDBY RATING		PRIME RATING (PRP)		STANDBY AMPER
	kW	kVA	kW	kVA	
400/231	88,00	110	80.0	100	158.78

STANDBY RATING (ESP) Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

PRIME RATING (PRP) Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

General Characteristics

Model Name	UJD 110
Frequency (Hz)	50
Fuel Type	Diesel
Engine Made and Model	John Deere 4045 HF 120
Alternator Made and Model	ECP 34-2S / 4 A
Control Panel Model	6020
Canopy	UP 40

Engine Specifications

Engine	John Deere
Engine Model	4045 HF 120
Number of Cylinder (L)	4 cylinders - in line
Bore (mm.)	106
Stroke (mm.)	127
Displacement (lt.)	4.5
Aspiration	Turbo Charged and After Cooled
Compression Ratio	17.0:1
RPM (d/dk)	1500

Manufacturer reserves the right to make changes in the model, technical specifications, color, equipment, accessories and images without prior notice.

Oil Capacity (Total With Filter) (lt)	16
Standby Power	91/122
Prime Power	102/137
Block Heater QTY	1
Block Heater Power (Watt)	750
Fuel Type	Diesel
Injection Type and System	Direct
Type of Fuel Pump	Stanadyne DB4 Rotary Type
Governor System	Mechanic
Operating Voltage (Vdc)	12 Vdc
Battery and Capacity (Qty/Ah)	1x66
Charge Alternator (A)	-
Cooling Method	Water Cooled
Cooling Fan Air Flow (m ³ /min)	159
Coolant Capacity (engine only / with radiator) (lt)	8.5/32
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (lt/hr)	23.5
Fuel Cons. Prime With %75 Load (lt/hr)	16.5
Fuel Cons. Prime With %50 Load (lt/hr)	11.5

Alternator Characteristics

Manufacturer	Mecc Alte
Alternator Brand and Model	ECP 34-2S / 4 A
Frequency (Hz)	50
Power (kVA)	105
Voltage (V)	400
Phase	3
A.V.R.	DSR
Voltage Regulation	(+/-)1%
Insulation System	H
Protection	IP21
Rated Power Factor	0.8
Weight Wound Rotor (Kg)	81
Cooling Air (m ³ /min)	19.3


Open Gen.Set Dimensions (mm)

Length	2150
Width	1050
Height	1460
Dry Weight (kg)	1200
Tank Capacity (lt)	240

Manufacturer reserves the right to make changes in the model, technical specifications, color, equipment, accessories and images without prior notice.

Lenght (mm) 3100 | Width (mm) 1110 | Height (mm) 1740 | Dry. Weight (kg) 1550 | Tank Capacit (lt) 240

1. Steel structures
2. Emergency stop push button
3. Control panel is right side of the set
4. Corrosion resistant locks and hinges
5. Base frame fuel tank
6. Lockable, large doors on each side.
7. Lifting Points

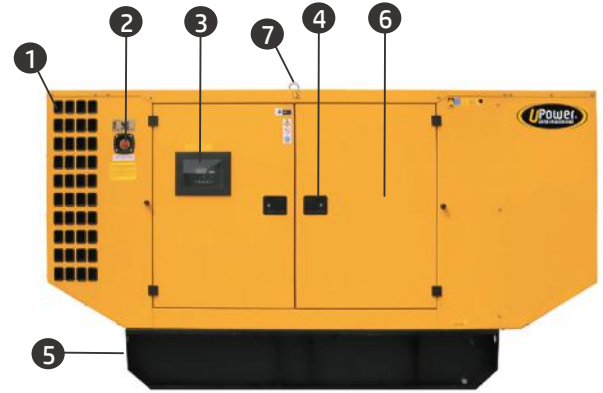

INTRODUCTION

Sound-attenuated and weather protective enclosures for generating sets from UPower, meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability

Control Panel

Control Module DSE | Control Module Model 6020 | Communication Ports Modbus



1. Main status display
2. Display scroll button
3. Page(information) button
4. Common alarm indicator
5. Status LED's
6. Operation selecting buttons

Devices

- DSE, model 6020 Auto Mains Failure control module
- Battery charger input 198-264 volt, output 27,6 V 5 A (24 V) or 13,8 Volt 5A (12V)
- Emergency stop push button and fuses for control circuits

Construction and Finish

Components installed in sheet steel enclosure.
 Phosphate chemical, pre-coating of steel provides corrosion resistant surface.
 Polyester composite powder topcoat forms high gloss and extremely durable finish.
 Lockable and hinged panel door provides easy access to components.

Installation

Control panel is mounted generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility

Generating Set Control Unit

- » The DSE 6020 is a standard control module for our generator sets up to 200kVA and it has been designed to start and stop diesel and gas generator sets
- » The DSE 6020 module has been designed to monitor generator frequency, volt, current, engine oil pressure, coolant temperature running hours and battery volts. Module monitors the mains supply and switch over to the generator when the mains power fails
- » The DSE 6020 also indicates operational status and fault conditions, Automatically shutting down the Gen. Set and giving true first up fault condition of Gen. Set failure. The LCD display indicates the fault

Standard Specifications

- Microprocessor controlled
- LCD display makes information easy to read
- 4-line, 64 x 132 pixel display
- Automatically transfers between mains (utility) and generator power
- Manual programming on front panel
- User-friendly set-up and button layout
- Remote start
- Event logging (5) showing date and time
- Controls: Stop/Reset, Manual, Auto, Test, Start, buttons. An additional push button next to the LCD display is used to scroll through the modules' metering displays

ENGINE

Engine speed
Oil pressure
Coolant temperature
Run time
Battery volts
Configurable timing

ELECTRICAL TRIP

Generator over current

WARNING

Charge failure
Battery Low/High voltage
Fail to stop
Low /High generator voltage
Under/over generator frequency
Over /Under speed
Low oil pressure
High coolant temperature

MAINS

Voltage (L-L, L-N)
Frequency
Mains ready
Mains enabled
Gen. Set ready
Gen. Set enabled

SHUT DOWNS

Fail to start
Emergency stop
Low oil pressure
High coolant temperature
Over /Under speed
Under/over generator frequency
Under/over generator voltage
Oil pressure sensor open
Coolant temperature sensor open

Instruments

GENERATOR

Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency

Options

- Flexible sensor can be controlled with temperature, pressure, percentage (warning/shutdown/electrical trip)
- Local setting parameters and monitoring from PC to control module with USB connection (max 6 mt)

Standarts

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment.
- BS EN 61000-6-2 EMC immunity standard.
- BS EN 61000-6-4 EMC emission standard

Static Battery Charger

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency

Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 13,8 V for 12 volt and 27,6 V for 24 V . Input 198 - 264 volt AC

Proline 2405 has fully output shot circuit protection and it can be used as a current source

Proline 1205/2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives

The charger is fitted with a protection diode across the output

Connect charge fail relay coil between positive output and CF output

They are equipped with RFI filter to reduce electrical noise radiated from the device

Galvanically isolated input and output typically 4kV for high reliability

Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Steel base frame and anti-vibration isolators
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

Optional Equipments

ENGINE

Electronic governor control
Fuel-Water Separator Filter
Low water level alarm
Oil heater

ALTERNATOR

Anti-Condensation Heater
Over sized alternator
Main line circuit breaker

CONTROL SYSTEM

Remote annunciator panel
Earth fault, single set
Charge Ammeter

TRANSFER SWITCH

Three or four pole contactor
Three or four pole motor operated circuit breaker

OTHER ACCESSORIES

Main Fuel Tank
Automatic or manual fuel filling system
Manual oil drain pump
Low and high fuel level alarm
Residential silencer
Enclosure: weater protective or sound attenuated
Duct adapter (on radiator)
Inlet and outlet motorised louvers
Inlet and outlet acoustic baffles
Trailer
Tool kit for maintenance
1500/3000 hours maintenance kit
Double wall chassis
Supplied with oil and coolant - 30 °C
Battery isolating switch

CERTIFICATES



Manufacturer reserves the right to make changes in the model, technical specifications, color, equipment, accessories and images without prior notice.